

PREMIER 

THE ORIGINAL SOURCE / THE ORIGINAL DESIGN

Skid Steer Loader
Trencher Attachments
Models T150, T250, T350

Product Specifications

PREMIER 
THE ORIGINAL SOURCE / THE ORIGINAL DESIGN

1631 East Pontiac Street

Fort Wayne, IN 46803

Toll Free: 1-866-458-0008

Phone: 260-456-8518

Fax: 260-456-6868

E-mail: greg@premierauger.com

www.premierauger.com



www.premierauger.com

PREMIER POWER High Performance Trenching

Premier Trencher attachments are designed to utilize the power of the host machine most efficiently, turning it into a high performance trenching machine.

PREMIER VERSATILITY Wide Range of Options Available

Premier Trencher Attachments offer a wide range of torque and speed combinations as well as teeth and chain options, sure to meet your needs.

PREMIER SERVICE Best Lead Times in the Industry

No matter how unique your trenching application may be, we're here to provide the solution when you need it.

PREMIER WARRANTY We Stand Behind Our Quality Statement

Premier takes great pride in the quality and reliability of our products. To reassure you that you are buying the best, we offer the best warranties in the industry and stand behind each quality statement.



- All Prices include Base Unit, Mounting Bracket, Boom, Spoil Auger, Chain, and Teeth.
- Quick-disconnect and Hoses are optional and are listed separately.
- Call Your Premier Dealer For Additional Pricing And Replacement Parts.

T150

For machines equipped with 15 to 20 gpm (57 - 76 lpm)
2000 - 4000 psi (141 - 281 kg/cm²)

OUTPUT SPEED	
FLOW GPM	SPEED RPM
15	116
17	131
19	146

OUTPUT TORQUE	
PRESSURE PSI	TORQUE FT-LB
2500	995
3000	1194
3500	1393

PART #	DESCRIPTION
T150-3DS-6W	T150 Trencher, 3' Boom, 6" Double Standard Chain
T150-3DS-8W	T150 Trencher, 3' Boom, 8" Double Standard Chain
T150-3DS-10W	T150 Trencher, 3' Boom, 10" Double Standard Chain
T150-3DS-12W	T150 Trencher, 3' Boom, 12" Double Standard Chain
T150-3ST55-6W	T150 Trencher, 3' Boom, 6" 50/50 Shark Tooth Chain
T150-3BT55-6W	T150 Trencher, 3' Boom, 6" 50/50 Bullet Tooth Chain
T150-3ST73-6W	T150 Trencher, 3' Boom, 6" 70/30 Scorpion Tooth Chain
T150-4DS-6W	T150 Trencher, 4' Boom, 6" Double Standard Chain
T150-4DS-8W	T150 Trencher, 4' Boom, 8" Double Standard Chain
T150-4ST55-6W	T150 Trencher, 4' Boom, 6" 50/50 Shark Tooth Chain
T150-4BT55-6W	T150 Trencher, 4' Boom, 6" 50/50 Bullet Tooth Chain
T150-4ST73-6W	T150 Trencher, 4' Boom, 6" 70/30 Scorpion Tooth Chain

T250

For machines equipped with 20 to 30 gpm (76 - 114 lpm)
2000 - 4000 psi (141 - 281 kg/cm²)

OUTPUT SPEED	
FLOW GPM	SPEED RPM
19	120
23	145
27	170

OUTPUT TORQUE	
PRESSURE PSI	TORQUE FT-LB
2500	1219
3000	1462
3500	1706

PART #	DESCRIPTION
T250-3DS-6W	T250 Trencher, 3' Boom, 6" Double Standard Chain
T250-3DS-8W	T250 Trencher, 3' Boom, 8" Double Standard Chain
T250-3DS-10W	T250 Trencher, 3' Boom, 10" Double Standard Chain
T250-3DS-12W	T250 Trencher, 3' Boom, 12" Double Standard Chain
T250-3ST55-6W	T250 Trencher, 3' Boom, 6" 50/50 Shark Tooth Chain
T250-3BT55-6W	T250 Trencher, 3' Boom, 6" 50/50 Bullet Tooth Chain
T250-3ST73-6W	T250 Trencher, 3' Boom, 6" 70/30 Scorpion Tooth Chain
T250-4DS-6W	T250 Trencher, 4' Boom, 6" Double Standard Chain
T250-4DS-8W	T250 Trencher, 4' Boom, 8" Double Standard Chain
T250-4ST55-6W	T250 Trencher, 4' Boom, 6" 50/50 Shark Tooth Chain
T250-4BT55-6W	T250 Trencher, 4' Boom, 6" 50/50 Bullet Tooth Chain
T250-4ST73-6W	T250 Trencher, 4' Boom, 6" 70/30 Scorpion Tooth Chain

T350

For machines equipped with 30 to 40 gpm (76 - 114 lpm)
2000 - 4500 psi (141 - 316 kg/cm²)

No Case Drain Line
Required

OUTPUT SPEED	
FLOW GPM	SPEED RPM
30	155
33	171
36	186
39	202

OUTPUT TORQUE	
PRESSURE PSI	TORQUE FT-LB
2500	1480
3000	1776
3500	2072

PART #	DESCRIPTION
T350-3DS-6W	T350 Trencher, 3' Boom, 6" Double Standard Chain
T350-3DS-8W	T350 Trencher, 3' Boom, 8" Double Standard Chain
T350-3DS-10W	T350 Trencher, 3' Boom, 10" Double Standard Chain
T350-3DS-12W	T350 Trencher, 3' Boom, 12" Double Standard Chain
T350-3ST55-6W	T350 Trencher, 3' Boom, 6" 50/50 Shark Tooth Chain
T350-3BT55-6W	T350 Trencher, 3' Boom, 6" 50/50 Bullet Tooth Chain
T350-3ST73-6W	T350 Trencher, 3' Boom, 6" 70/30 Scorpion Tooth Chain
T350-4DS-6W	T350 Trencher, 4' Boom, 6" Double Standard Chain
T350-4DS-8W	T350 Trencher, 4' Boom, 8" Double Standard Chain
T350-4ST55-6W	T350 Trencher, 4' Boom, 6" 50/50 Shark Tooth Chain
T350-4BT55-6W	T350 Trencher, 4' Boom, 6" 50/50 Bullet Tooth Chain
T350-4ST73-6W	T350 Trencher, 4' Boom, 6" 70/30 Scorpion Tooth Chain
T350-5DS-6W	T350 Trencher, 5' Boom, 6" Double Standard Chain
T350-5ST55-6W	T350 Trencher, 5' Boom, 6" 50/50 Shark Tooth Chain
T350-5BT55-6W	T350 Trencher, 5' Boom, 6" 50/50 Bullet Tooth Chain
T350-5ST73-6W	T350 Trencher, 5' Boom, 6" 70/30 Scorpion Tooth Chain

Deeper/Wider trenching options are available upon request, call Premier for information.

ALL PREMIER TRENCHER ATTACHMENTS SHIP COMPLETELY ASSEMBLED AND WORK-READY

HEAVY DUTY PLANETARY DRIVE SYSTEM ELIMINATES CHAIN REDUCTION

EXCEPTIONAL VISIBILITY AND STRUCTURAL STRENGTH


HEAVY-DUTY CRUMBER SHOE ACCESSORY FOR LOOSE SOIL REMOVAL

REPLACEABLE SPOIL AUGER MOUNDS MOST SPOIL TO ONE SIDE OF TRENCH

MANUAL SIDE-SHIFT FOR TRENCHING CLOSER TO STRUCTURES

A BUILT-IN SKID SHOE PROVIDES PROPER AUGER DEPTH CONTROL

2-YEAR MOTOR AND PLANETARY / 1-YEAR FRAME WARRANTY

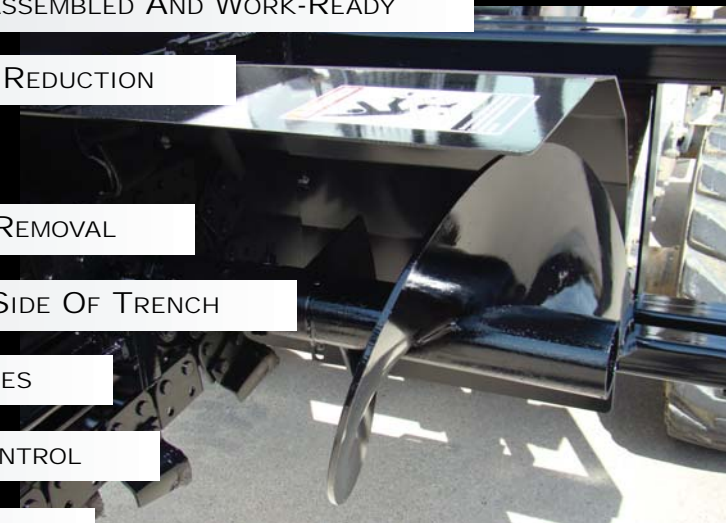

CHAIN OPTIONS



DOUBLE
STANDARD
CHAIN



50/50
BULLET
TOOTH
CHAIN



70/30
SCORPION
CHAIN



50/50
SHARK
TOOTH
CHAIN

HOSES & COUPLERS

# 61050	1/2" Hydraulic Hoses, 108" Long (Models T150 & T250)
# 61006	1/2" Female Flat Faced Coupler (Models T150 & T250)
# 61007	1/2" Male Flat Faced Coupler (Models T150 & T250)
# 61051	3/4" Hydraulic Hoses, 108" Long (Model T350)
# 61043	3/4" Female Flat Faced Coupler (Model T350)
# 61044	3/4" Male Flat Faced Coupler (Model T350)